

H2 Green Metals (H2GM) is a novel, cutting-edge extractive metals company designed to be at the heart of Green Metals production, Sustainability and combatting Climate Change. Our modern world depends upon metals for its very existence, but incumbent methods of recovering these metals leave much to be desired, both in terms of carbon footprint and sustainability. Historical mining and extractive methods were not very efficient, and there are numerous old tailings dumps which contain the metals now in short supply. Whilst iron is not in short supply, GREEN IRON & STEEL is almost non-existent ... until now.

Snapshot			
Metals Jurisdiction:	Worldwide	Entity:	H2GreenMetals SPV
Start Launch Date:	H1 2024	Portfolio:	Green Hydrogen, Green Iron, Green Steel, Green Titanium, Critical and Battery Metals
Input:	3000 tonnes pyrrhotite/day	Output:	500,000 tonnes of Green Steel per annum
Carbon footprint saving:	15 million tonnes CO ₂ avoided (circa 2025-2040)		

Pathway to Green H₂ Production

Foremost in many of these dumps is the iron mineral, pyrrhotite, which is highly reactive and is responsible for acid mine drainage into the environment. Pyrrhotites typically contain around 50% iron and 35% sulphur. Incumbent technologies are unable to process this mineral, and certainly not recover the iron, yet it is almost ubiquitous in mineral deposits. In addition to valuable metals such as nickel, copper and cobalt, pyrrhotites have significant intrinsic energy – all of these can also be recovered by the H2 Green Metals Technology. The energy can be recovered as green hydrogen or electric power, and is thus a way of leading towards decarbonisation of metal production, and hence Green Steel production.

Table 1. Road Map to Commercialisation

Task	Size	Capital US\$ million	Operating US\$/tonne pyrrhotite
Test/Pilot	1 tonne/day	10	Included in capital
PEA (Preliminary Economic Assessment)			
Demonstration	100 tonnes/day	80	1200*
DFS (Definitive Feasibility Study)			
Commercial	Up to 3000 tonnes/day	500	50**
* - no allowance for any by-product credits			
** - inclusive of by-product credits			

Figure 1 shows the basic block flow diagram of the H2 Green Metals Process Technology



Hydrolysis (Acid Recovery) Pilot Unit

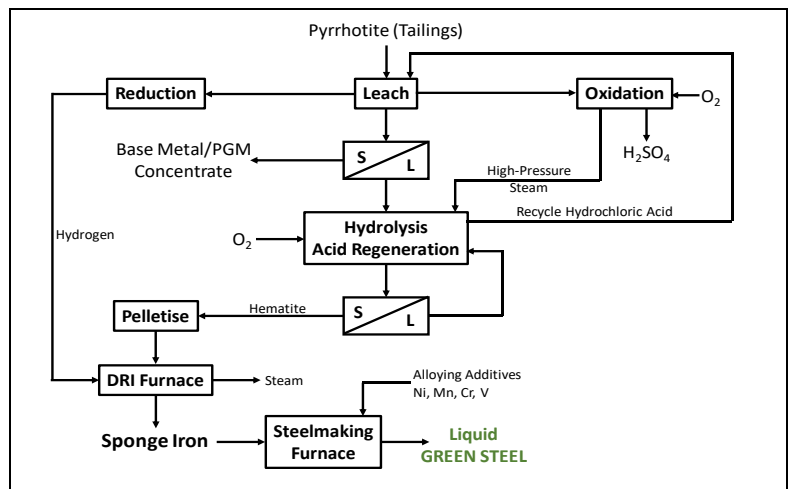


Figure 1. Block Flow Diagram of Basic H2 Green Metals Process

A. Roadmap

The process is highly flexible. There are two options for recovering energy, either as hydrogen, which can be further used to produce green iron/steel from the iron contained in the pyrrhotite feed, or as clean electric power. It will be noticed that green iron and steel can be recovered without recourse to mining iron ore since the iron naturally comes with the mineral pyrrhotite. H2 Green Steel in Sweden, for example, cannot do this. Further, whatever base and precious metals are contained in the pyrrhotite can also be recovered. Finally, high-purity sulphuric acid, which is in increasing demand for redox flow batteries, can also be generated.

B. By-Product Credits

Pyrrhotites nearly always come associated with base and precious metals, e.g. the Sudbury Tailings in Ontario, which have an estimated US\$1 billion of in-demand battery metals contained therein. Table 2 shows the potential, again taken from the Sudbury Tailings.

Table 2. Iron and By-Product Credits (3000 tonne/day pyrrhotite feed)

Item	Annual Production	Price*, US\$/unit	Revenue US\$ M/year
Nickel as Ni, in mixed sulfide	8,400 t	7.41/lb	137
Copper as Cu, in mixed sulfide	3,150 t	3.87/lb	27
Cobalt as Co, in mixed sulfide	315 t	15.00/lb	10
PGMs as metal (mainly Pd)	64,000 oz	1000/oz	64
Hematite (100% Fe ₂ O ₃)	788,000 t	200/t	158
Surplus power	19 MW	0.05/kWh	8

* - prevailing commodity metal prices as of January, 2024

By-product credits are included here because they add immeasurably to the overall process economics. For this exercise, iron was calculated as hematite, but could produce 540,000 tonnes of green sponge iron, which in turn is the precursor to green steelmaking. In such a case, the surplus power would be hydrogen.

C. Decarbonisation Potential

Due to its intrinsic energy, pyrrhotite has the potential to replace energy currently supplied by fossil fuels such as coal and natural gas. The following table assumes that coal is 100% C and that natural gas is 100% methane.

Table 3. Decarbonisation Potential

Annual feed of pyrrhotite mineral	1 million tonnes
Coal equivalent, tonnes	182,750 (low) to 246,500 (high)
Natural gas equivalent, tonnes	120,000 (176,000m ³) (low) to 161,500 (237,500m ³) (high)
CO ₂ not emitted by coal, tonnes	670,650 (low) to 900,000 (high)
CO ₂ not emitted by gas, tonnes	330,000 (low) to 650,000 (high)

D. Relevance to the Iron/Steel Industry - Green Steel Production

The following indicates the key metrics as applied to the iron/steel industry. If the plant is sited adjacent to an existing steel mill, any waste heat generated by the mill can be used by the pyrrhotite plant, resulting in additional green power being available for sale. For this exercise, 3000 tonnes/day of pyrrhotite feed has been chosen as a reasonable size for a first commercial plant. Ultimately, there is no reason why this could not be doubled or tripled, but will be dependent upon mining rate and feedstock availability.

Table 4. Key Metric for the Iron/Steel Industry (single plant - 3000 tonnes/pyrrhotite/day)

540,000* tonnes of Green Sponge/Iron annually per plant	0 tonnes of iron ore needing to be mined	<1% CO ₂ Emissions	15 million tonnes of CO ₂ avoided per plant by 2040	>540,000** tonnes of Green Steel annually per plant
* - for one single plant only. Potential for multiple brown or even greenfield plants				
** - the amount of Green Steel will be dependent upon the type of steel being produced				

H2 Green Metals converts environmentally damaging metallurgical waste into clean, net-zero carbon-free energy, Green Steel and valuable critical commodities.

Hydrochloric Acid Regeneration Technology (AR5)

E. Summary of its Economic Worth and Potential

- This section summarises the Hydrochloric Acid Regeneration (AR) Process application. The process solves many of the problems currently encountered in the traditional sulphate-based processing of mineral resources, notably “the iron problem” and the recovery and recycle of high-strength (30-35%) hydrochloric acid, and in the cases of the projects listed below, is the only real option for the recovery of all of the metals involved.
- Based on anticipated revenues and current prices, the projected value of the technology ranges from US\$237 million to US\$2.4 billion.

A. Summary

Eight currently active projects, i.e. those which are currently in discussion, have been considered, namely two projects for the treatment of VTM ores and concentrates (including mineral sands); production of high purity manganese sulphate, the processing of a nickel laterite and associated ferronickel slag; Zncore, the recovery of zinc (and associated metals) from EAFD (electric arc furnace dust), a steel plant waste; recovery of critical and battery metals from spent batteries; de-toxification and metal recovery from Chingola Tailings in Zambia; production of hydrogen from pyrrhotite tailings; production of green metals in combination with hydrogen production. These are areas where incumbent technologies are either totally inadequate, or where the technology does not even exist. Total revenues accruing from the projects under consideration, all of which require acid regeneration as the cornerstone of a commercial plant, have been assessed using current metal prices. The valuation of the AR Process has then been taken as 0.5% of these revenues as the low end, and using a more common 5% royalty rate for the high end. Under this assessment, the AR Process is estimated to have a current value of US\$237 million at the lower end, and US\$2.4 billion at the upper end.

The intent is to create a H2GM Hub centred on Port Belledune in New Brunswick on Canada’s eastern seaboard. This is currently a depressed mining area, with the last major operation, the Brunswick Lead Smelter, having shut down in 2019. There are over 50 years worth of pyrrhotite-based tailings close by, as well as an experienced local work force, four year-round deep sea ports and ready access to N. and S. American, European and southern African markets. The New Brunswick government, through the BPA (Belledune Port Authority), has issued a master plan to create a Green Hub, which is in perfect synchronization with the aspirations of H2GM.

B. Background

Global Warming and Climate Change are issues that effect every single person on this planet, and there is, at last, a realisation that something has to be done about it. The move towards “Net (carbon) Zero” is proceeding apace, and electrification coupled with environmental responsibility is key in this respect. We have to look after our planet – unlike our forebears, we cannot just pack up and sail off to a Brave New World. The nearest exo-planet is some 4.5 light years away, and even if we were able to travel at the Warp speed of Star Trek, it would still take a long time to get there.

Metals extraction, and more importantly, process-efficient, environmentally-friendly, energy-efficient metals extraction has a huge role to play in electrification and the move to Net Zero. Hydrogen, along with the energy metals, such as nickel, cobalt, copper, lithium and vanadium are key to the low-carbon future. In this respect, current extraction technologies, which are either largely sulphate-based or involve smelting in one form or another, are the antithesis of what the modern world needs. This is especially true for vanadium extraction (salt roast) and nickel extraction from laterites (HPAL – High Pressure Acid Leach). These technologies are unable to recover the maximum metal amount from the ore, generate huge amounts of iron-based toxic wastes and are unable to recover any of the intrinsic energy contained in the ore, especially from sulphide feeds. There are also numerous base and precious metals tailings impoundments scattered around the globe that contain billions of dollars of discarded metals, not to mention the fact that they are huge environmental liabilities.

Chloride-based processing offers many advantages, ones that can sensibly and efficiently address the shortcomings of the incumbent sulphate-based pyrometallurgical and hydrometallurgical processes. Seventy years ago, the renowned metallurgist Herbert H. Kellogg wrote:

F. Pyrrhotite Tailings - Green Hydrogen Production

- This is essentially two projects, although different in nature, but based on the same fundamentals of treating pyrrhotite tailings, or even primary pyrrhotite, with recycled hydrochloric acid from the AR process.
- There are two options as to how this proceeds. In the first option, electric power is generated, and surplus power is fed back into the grid. In the second option, proprietary green hydrogen is liberated, which in turn converts the iron in the feed into green sponge iron, and thence into green steel.

“CHLORINE metallurgy has attracted metallurgists for more than a century because the unusual properties of the metallic chlorides - low melting point, high volatility, and ease of formation from the oxides - make possible many useful extractive processes. Interest in chlorine processes is undergoing a renaissance due to present availability of chlorine at relatively low prices, and to recent advances in technology.”

Despite this, sustainable chloride-based metallurgy has not been widely adopted by the metals extraction industry. However, the Climate Crisis mandates that this has to change. The main drawback to the wide adoption of such processes has been the inability to efficiently and selectively recycle hydrochloric acid within the flowsheet. The most common methodology of doing this has been pyrohydrolysis, either via spray roasting or fluid bed roasting, which is costly, energy-intensive, cannot selectively recover any valuable metals contained in the feed solution, and generates sub-azeotropic (<20%) hydrochloric acid. With its proprietary acid regeneration (AR) process, H2GM overcomes all of these issues, by being able to generate 30-35% HCl, and simultaneously allow for the recovery of a high-purity iron product which has a market value rather than having to be disposed of, and is able to recover any valuable base metals contained therein.

C. Projects Considered for Acid Regeneration Evaluation

At the present time (January, 2024), H2GM has eight active projects wherein hydrochloric acid regeneration has a crucial role to play. These comprise two VTM/Mineral Sands (Vanadiferous Titaniferous Magnetite) ores and concentrates, a high-purity manganese sulphate project based either or both of manganese fines and geothermal lithium brines purification cakes, a nickel laterite/ferro-nickel slag, EAFD (Electric Arc Furnace Dust), generation of hydrogen from pyrrhotite tailings, the production of green metals, notably iron, in conjunction with the hydrogen project, remediation of copper/cobalt tailings in Zambia, and the recovery of critical/battery metals from spent batteries. Beyond these, the technology also has huge potential in the reprocessing of other base metal and gold tailings (and also ores), and for metalliferous massive sulphide deposits.

1. Green Titanium, Vanadium, Iron from VTM Ores, Concentrates and Mineral Sands

Current technologies for these types of ores are pyrometallurgical or a combination pyro/hydrometallurgical for the recovery of titanium, or pyrometallurgical (salt roast) for the recovery of vanadium. Strangely, and wastefully, these processes only focus on one of the main metals, with no effort made to recover the other. Titanium is usually recovered from a slag formed by smelting to generate pig iron. The slag is then further processed in another pyrometallurgical process, the so-called high temperature “Chloride Process” to recover a TiO₂ product suitable as a feed for pigment manufacture. Generally, no attempt is made to recover the vanadium. Alternatively, it is recovered from the so-called “syn-rutile” (synthetic rutile) which is produced hydrometallurgically from ilmenite, with the generation of huge volumes of toxic iron wastes, which is then fed into the “Chloride Process.”

With the increasing demand for vanadium, a number of so-called “salt roast” projects are being (re-)considered, wherein no attempt is made to recover the titanium. Such projects are marginally economic at best.

H2GM technology recovers both high-purity TiO₂ and V₂O₅ directly in the same flowsheet, the former suitable for pigment manufacture and the latter for generating electrolyte for VRFBs (Vanadium Redox Flow Batteries). Acid regeneration is the key unit operation in this process. Currently, H2GM is actively working with two companies with a view to processing both VTM ore and a mineral sands concentrate (tailings from zircon production). The annual production is taken as the average of the proposed production from the two operations.

Table 5. Economics of Processing VTM Ores

Metal	Production tonnes/annum	Price* US\$/tonne	Revenue Million US\$/annum
Titanium, as TiO ₂	200,000	3000	600
Vanadium, as V ₂ O ₅	5,000	17,500	87.5
Iron, as hematite	700,000	200	140
Total for one plant			827.5
Total for two plants			1,655

* - prevailing commodity metal prices as of January, 2024

2. High Purity Manganese Sulphate (HPMSM) from Hydrothermal and/or Manganese ROM/Fines

Traditionally, lithium extraction involves either open-pit mining or evaporation ponds, which work by pumping lithium-containing brine to the surface and waiting for the water to evaporate. Both of these methods have huge land footprints, are often very water intensive and can create a lot of contamination and waste. But at the Salton Sea in Southern California, three companies are developing chemical processes to extract lithium in a much cleaner way, taking advantage of the Salton Sea’s rich geothermal resources. Near the lake, there are already 11 operating geothermal power plants, 9 of which are owned by Berkshire Hathaway’s renewable energy division, BHE Renewables. Two other companies,

Energy Source Minerals (ESM) and Controlled Thermal Resources, or CTR, are also developing joint geothermal-lithium facilities at the Salton Sea, and General Motors has already committed to source lithium from CTR.

In order for the DLE (Direct Lithium Extraction) Process to function, pre-treatment of the brine is necessary to remove manganese and zinc, which is an impurity for lithium, but a potential source of additional revenue otherwise. H2GreenMetals is involved as being the only process available to be able to separate Zn and Mn from an intermediate containing these deleterious impurities, and is projected to be the only technology capable of generating both high purity Mn and Zn as co-products by way of first standalone Manganese Sulphate Monohydrate plant in United States. The company is targeting making energy metals as a precursor for battery metals.

Table 11. Economics of Processing Cake from Hydrothermal Brine

Metal	Production tonnes/annum	Price US\$/tonne	Revenue Million US\$/annum
Zinc as Zn metal in ZnO	16,210	2606	42
Mn as MSMH (sulphate monohydrate)	98,435	3000	295
Total for one plant			337
* - prevailing product prices as of January, 2024			

3. Electric Arc Furnace Dust (EAFD)

There are approximately 6 million tonnes of EAFD generated annually with an intrinsic metal value of over US\$8 billion. Where any treatment is applied at all, it is by the Waelz Kiln, a costly pyrometallurgical process which is energy-intensive, has a very high carbon footprint, and only generates an intermediate, impure zinc oxide which requires further processing to be of any value. H2GM (ZnCore process) recovers high-purity zinc oxide directly, as well as generating a valuable by-product used in the fertiliser industry, sodium bisulphate. Currently, ZnCore is in discussions to build one commercial plant of 400 tonnes/day in Quebec. Table 7 summarises the high-level economics for a 400 tonne/day plant. There are also other metals such as copper, cadmium and manganese present which can be recovered, but are not included in the economic analysis below.

Table 7. Economics of Processing EAFD

Metal	Production tonnes/annum	Price* US\$/tonne	Revenue Million US\$/annum
Zinc, as ZnO	41,500	2606	108
Iron, as hematite	80,000	200	16
By-product, NaHSO ₄	78,800	500	39
Total for one plant			163
* - prevailing commodity metal prices as of January, 2024			

The process also allows for small modular plants that can be put on site for throughputs as low as 10 tonnes/day, and in Europe, in particular, several operations have indicated interest in doing so.

4. Green Hydrogen/ and

5. Green Steel

These two projects, although different in nature, are based on the same fundamentals of treating pyrrhotite tailings, or even primary pyrrhotite, with regenerated hydrochloric acid from the H2GM AR process being the critical unit operation. There are two options as to how this proceeds. In the first option, clean electric power is generated and surplus power is fed back into the grid. In this case, the products, in addition to the base and precious metals, are elemental sulphur (or sulphuric acid) and hematite.

In the second option, instead of sulphur and power, green hydrogen and green iron sponge are generated. The production of sponge iron as a precursor to final-product green steel is accomplished via reducing the hematite with hydrogen in a standard steel plant DRI furnace. In this way, green iron is produced, along with other contained metals, Ni, Co, Cu, PGMs, etc. Table 8 shows the high-level economics of treating pyrrhotite tailings. In this analysis, it is assumed that electric power will be produced – this is simply because extensive work has been carried out on this option. The overall result of producing green sponge iron and surplus green hydrogen will not be markedly different.

Table 8. Economics of Processing Pyrrhotite Tailings

Item	Production tonnes/annum	Price* US\$/tonne	Revenue Million US\$/annum
------	-------------------------	-------------------	----------------------------

Nickel as Ni, in mixed sulfide	8,400 t	16,337	137
Copper as Cu, in mixed sulfide	3,150 t	8,530	27
Cobalt as Co, in mixed sulfide	315 t	33,033	10
PGMs as metal**	64,000 oz	1000/oz	64
Hematite	788,000 t	200	158
Claus plant	348,000 t	50	21
Surplus power	19 MW	0.05/kWh	8
Total for one plant			425
* - prevailing commodity metal prices as of January, 2024			
** - predominantly platinum			

These economics are based on treating 3000 tonnes/day of reclaimed tailings, which are 75% pyrrhotite, and with an average Ni grade of 0.8%. This is typical of what might be encountered in the Sudbury Basin in Canada.

6. Battery Metals Recycling - Cobalthium

Recycling of Spent Batteries is assuming increasing importance in that for the electric revolution to be sustainable, recycling of the nickel, cobalt, lithium and copper (along with manganese) is essential if the supply chains are to be maintained. Most current recycling technology involves smelting, which is both energy-intensive and environmentally unsound, and really recovers only the nickel, cobalt and copper. There are numerous start-up companies claiming “novel hydrometallurgical processes” capable of high recoveries of all metals at battery-grade purity. None has actually delivered on this. These processes are generally based on multiple different solvent extraction (SX) circuits, which when run in combination are simply incapable of delivering what is claimed. Some companies, having realised this, are now promoting “cathode precursors” wherein a mixed oxide product is being produced, supposedly in the ratios demanded by the battery OEMs. H2GM has developed a non-SX process which solves the problems of the above circuits, and is capable of generating pure, battery-grade products of all of the metals.

Table 9. Economics of Processing Recycled Spent Lithium-ion Batteries

Metal	Production tonnes/annum	Price US\$/tonne	Revenue Million US\$/annum
Nickel, as metal	1487	16,337	24
Cobalt, as metal	1277	33,003	42
Copper, as metal	200	8,530	2
Manganese, as HPMSM	3800	3000	11
Lithium, as Li ₂ CO ₃	2870	29,000	83
Total for one plant			162
* - prevailing commodity metal and product prices as of January, 2024			

The high-level economics associated with treating 10 tonnes/day of each of NMC (EV batteries) and LCO (consumer batteries) in a combined plant. It is worth noting that battery recycling can be carried out in either sulphate or chloride media. The latter offers a more flexible flowsheet, with the options of generating chloride salts or metal oxides. The former generates metal sulphate salts, which up to date are the preferred form required by the Battery OEMs. However, this is changing, simply due to the vast volumes of sodium sulphate thus generated in formulating the battery cathodes, which is becoming an environmental issue in terms of its disposal, since there is no market for such volumes.

7. Copper/Cobalt Mine Tailings, Zambia

The Copperbelt of Zambia has been mining ores for nearly a century. In the early days, cobalt was (surprisingly in view of its role today) regarded as a nuisance and not worth recovering, so the tailings contain appreciable levels of cobalt that is worth recovering. In the 1970s, Zambia was one of the first countries to recognise the need for re-processing of tailings for metal recovery, but again, copper was the only the focus, and the Tailings Leach Plant was built at Chingola. However, this plant focused only on the copper **oxide** tailings. There remain significant **sulphide** tailings, containing both copper and cobalt. In this evaluation, cobalt has not been considered, because its concentration is not known at this time. Zambian ores typically contain Cu:Co ratios anywhere from 100:1 to 10:1, and it would be anticipated that the cobalt content of the tailings would be higher than this relative to the copper, but this is not known at this time.

The H2GM chloride process is perfectly suited to treat these sulphide tailings, and discussions are underway to this effect. Based on the work done with pyrrhotite tailings, and assuming a treatment rate of 3000 tonnes/day at 0.2% Cu, Table 10 presents the high-level economics. This project will not, however, be one carried out at the Port Belledune Hub, but rather on-site in Zambia.

Table 10. Potential Economics for Zambian Tailings

Metal	Production tonnes/annum	Price US\$/lb	Revenue Million US\$/annum
Copper	2000	3.87	17.1
Total for one plant			17.1

* - prevailing commodity metal prices as of January, 2024

8. Nickel Laterite Ore/Ferronickel Slag

Over 70% of the world’s nickel reserves are contained in laterites. These ores also contain appreciable cobalt values, and therefore offer a “non-conflict” source not reliant on the DRC. They are, however, traditionally difficult to process, particularly in that they are not amenable to simple physical upgrading. The rapidly increasing demand for nickel (and cobalt) means that laterites will have to be processed in one way or another to recover the nickel (and associated cobalt). Smelting is not an option, since it generates ferronickel (which is not suitable for batteries), is very energy intensive, and does not recover the cobalt. In this context however, there are slags from ferronickel smelting which contain appreciable nickel, and upgraded cobalt which can be processed on their own, or, preferably along with fresh laterite ore.

The current alternative, High Pressure Acid Leaching (HPAL) has never been successful. Eleven HPAL plants have in total been commissioned, and none of them has been a success (not including the current Chinese ones being commissioned in Indonesia, which have their own additional unique problems). Even the Sumitomo plants in the Philippines have experienced significant problems. The problems with HPAL are considerable. The capital outlay for a 50,000 tonne/annum nickel plant is considerable, being several billions of dollars. The process generates approximately 1.5 tonnes of toxic, slimy iron residue for every tonne of laterite mined, and has a massive physical footprint because it is impossible to filter the leach residue, thus requiring a series thickeners. It is also incapable of recovering any metal values other than nickel and cobalt.

The H2GM Process addresses all of these challenges, and Acid Regeneration is the key unit operation which permits this. In this case, the leach residue is reduced to about 20% of the ore mined, and can be used as road aggregate or flux for a steel mill. Other metals such as iron, manganese, magnesium and aluminium can all also be recovered in a useful form. Furthermore, the process can treat all horizons of the orebody, limonite, transition zone and saprolite, whereas HPAL is limited to just the limonite (ferronickel smelting is limited to predominantly just the saprolite horizon). This effectively doubles the resource. H2GM is currently in advanced discussions with a significant landmark project in Western Australia.

To illustrate this point, consider a typical nickel laterite, with a composition of 1.2% Ni, 0.1% Co, 5% Al, 15% Mg, 30% Fe is processed with 90% recovery of Ni, Co, and Fe, and 75% recovery of Al and Mg. Taking prices of US\$7.41/lb for Ni, US\$15/lb for Co, \$0.2/lb for Al₂O₃, \$200/tonne for Fe₂O₃ and \$350/tonne for MgO, the following revenues are generated for a plant nominally producing 50,000 tonnes of LME grade Ni.

Table 6. Economics of Processing Nickel Laterite Ores

Metal	Production tonnes/annum	Price US\$/tonne	Revenue Million US\$/annum
Nickel, as metal	50,000	16,337	816
Cobalt, as metal	4150	33,003	136
Iron, as hematite	1,780,000	200	356
Magnesium, as MgO	1,510,000	350	530
Aluminium, as Al ₂ O ₃	328,000	440	140
Total for one plant			1978

* - prevailing commodity metal prices as of January, 2024

By this analysis, the revenues of the project can be increased significantly against those generated simply by considering nickel (and cobalt). Furthermore, there are additional benefits in that there are close to 3.3 million tonnes of residues that will not have to be disposed of and monitored.

D Projects Breakdown

The following Table 12 summarises the revenues to be anticipated from each of these projects wherein the Acid Regeneration Technology is a key operating component.

Table 12. Summary of AR-correlated Projects

Metal/Project	Production tonnes/annum	Price US\$/tonne	Annual Revenue Million US\$
P1 - Green Titanium - VTM Ores (Vanadiferous Titaniferous Magnetite)			
Titanium, as TiO ₂	200,000	3000	600
Vanadium, as V ₂ O ₅	5,000	17,500	87.5
Iron, as hematite	700,000	200	140
Total from one plant			827.5
Total from two plants			1,655
P2 - Manganese and Zinc - HPMSM			
Zinc as Zn in ZnO	16,210	2606	42
Mn as MSMH (sulphate monohydrate)	98,435	3000	295
Total from one plant			337
P3 - EAFD (Electric Arc Furnace Dust)			
Zinc, as ZnO	41,500	2606	108
Iron, as hematite	80,000	200	16
By-product, NaHSO ₄	78,800	500	39
Total for one plant			163
P4/P5 - Green Steel – Green Hydrogen - H2 Green Metals			
Nickel as Ni, in mixed sulfide	8,400	16,337	137
Copper as Cu, in mixed sulfide	3,150	8,530	27
Cobalt as Co, in mixed sulfide	315	33,033	10
PGMs as metal (mostly Pt)	64,000 oz	1000/oz	64
Hematite	788,000	200	158
Claus plant	348,000	50	21
Surplus power	19 MW	0.05/kWh	8
Total for one plant			425
P6 - Battery Metals/Recycling - Cobalthium			
Nickel, as metal	1487	16,337	24
Cobalt, as metal	1277	33,003	42
Copper, as metal	200	8,530	2
Manganese, as HP MnSO ₄ •H ₂ O	3800	3000	11
Lithium, as Li ₂ CO ₃	2870	29,000	83
Total for one plant			162
P7 – Green Copper/Cobalt Tailings			
Copper	2,000	3.87	17
Total for one plant			17
P8 – Green Nickel/Cobalt from Laterite Ore/Ferronickel Slag			
Nickel, as metal	50,000	16,337	816
Cobalt, as metal	4,150	33,003	136
Iron, as hematite	1,780,000	200	356
Magnesium, as MgO	1,510,000	350	530
Aluminium, as Al ₂ O ₃	328,000	440	140
Total for one plant			1,978
Overall Total Annual Revenue			4,737
Low valuation – 0.5% of 10-year revenue			237
High valuation – 5% royalty on 10-year revenue			2,369

E AR valuation

The following table summarises the revenues from the above projects:

Table 12. Summary of Potential Revenues from Ongoing AR Plants

Plant	Annual Revenues Million US\$	10-Year Revenues Billion US\$
VTM Ores	1,655	16.55
Nickel Laterites	1,978	19.78
EAFD	163	1.63
H2 Green Metals	425	4.25
Battery Metals	162	1.62
Zambian Tailings	17	0.17
High-Purity Manganese and Zinc	337	3.37
Total	4,737	47.37
Low- 0.5% of 10-year revenue		237 million
High – 5% royalty on 10-year revenue		2.4 billion

- The above is an indication what the adoption of the H2GM AR Technology is worth in terms of hard cash. There are, however, significant intangibles that have not been taken into consideration. These are based on the fact that all of the above projects are simply not viable without the AR process. They would not, therefore, be able to take advantage of the prevailing Carbon-Neutral climate, the prevailing march towards electrification and the fight against the disasters of Climate Change.
- In summary, this analysis indicates that the AR technology has a minimum value of US\$237 million. If a typical royalty scenario of 5% of gross revenues is taken (H2GM already has multiple such licence agreements in discussions), then the current value would be US\$ 2.4 billion.

Copyright © 2024. H2GreenMetals All rights reserved.

The content of this document is owned by H2GreenMetals Ltd and is made available under strict confidentiality and pursuant to non-disclosure agreements that may apply to you. H2GreenMetals permits you to have access to the content of this document but you acknowledge that your use of that content is governed by applicable copyright, trademark or other intellectual property law and agree that the content of this document may not be copied for commercial use or distribution, modified forwarded or re-transmitted to any other person or persons without written consent from H2GreenMetals.

The trademark "H2GreenMetals" and other forms thereof are the property of H2GreenMetals.

The material provided on this document is protected by Canadian, UK, USA and worldwide copyright laws and treaties. Except as specifically stated, none of the material may be copied, reproduced, distributed, republished, downloaded, displayed, posted, or transmitted in any form without prior written permission. You also may not, without H2GM's written consent, forward any material contained in the document to any third parties. Permission is granted for you to make a single copy of documents published by H2GreenMetals in the document solely for information and non-commercial use within your organization, provided that you keep intact all copyright and other proprietary notices. No other use of the information provided on the document is authorized.

Forward-looking Statement

This document may contain forward-looking information [including forward-looking information within the meaning of applicable Canadian, UK, and United States securities legislation], with respect to H2GreenMetals' operations and future financial results. Such forward-looking statements involve known and unknown risks, uncertainties and other factors that may cause the actual results, performance, or achievements of H2GreenMetals and or the commercial sectors in which it operates to be materially different from future results, performance or achievements expressed or implied by these forward-looking statements.

These risks, uncertainties and other factors include, but are not limited to, changes in the world price of the commodities which H2GreenMetals produces, foreign exchange exposure and sovereign risks, as well as the risks inherent in H2GreenMetals' various businesses.

The risk factors are set out in detail in H2GreenMetals' most recent communication releases, available upon request subject to appropriate consents.

H2GreenMetals disclaims any intention or obligation to update or revise any forward-looking statements whether as a result of new information, future events or otherwise, or to explain any material difference between subsequent actual events and such forward-looking statements, except to the extent required by applicable law.